

Design and experiment of seed posture detection and adjustment device for garlic

Aijun Geng,^{1,2,3} Xinzhe Lin,¹ Fengshuai Li,¹ Zhilong Zhang,^{1,2,3} Tianhua Li,^{1,2,3} Zongxin Guo^{1,2,3}

¹College of Mechanical and Electrical Engineering, Shandong Agricultural University, Tai'an; ²Shandong Key Laboratory of Intelligent Production Technology and Equipment for Facility Horticulture, Tai'an; ³Shandong Engineering Research Center of Agricultural Equipment Intelligentization, Tai'an, China

Abstract

In order to solve the problem of low orientation adjustment success rate and unsatisfactory orientation effect in garlic mechanical seeding, a garlic seed posture detection and adjustment device for garlic was designed. The device was developed to recognize garlic posture and control garlic posture through video acquisition, target detection and garlic directional motion control, which consisted of a posture adjustment system and an automatic control system. The posture adjustment device was designed to finish garlic bud orientation change, which consisted of a rotating plate, a shell, a conveyor pipe, a garlic funnel, a seed tube, and a fixed plate. The diameter of the conveyor pipe was determined based on the morphological parameters of the garlic seeds. Based on the mechanical analysis of garlic seeds in the conveyor pipe, the length and inclination of the conveyor pipe were determined. The automatic control system was designed to execute and control camera shooting, image processing and target detection, input action signal to the controller and receive feedback of action signal. The improved SSD algorithm was adopted to improve the identification accuracy of garlic posture detection. After the key components of the device were designed, the garlic seed posture detection and adjustment device test bench was built. The total time for garlic seed scale bud orientation detection, conveyance, and adjustment is 0.81 s. After adjustment, the upward rate of garlic buds was greater than or equal to 98.6%, and the orientation time of garlic buds adjustment was 0.5 s. The design of the device significantly improves the efficiency and accuracy of garlic seed orientation adjustment, which meets the requirements of garlic mechanical seeding.

Key words: garlic; pointed-end-up garlic planting; posture detection; adjustment.

Correspondence: Zhilong Zhang, College of Mechanical and Electronic Engineering, Shandong Agricultural University, Tai'an 271000, China.
E-mail: sdauzzl@163.com

Introduction

As a common condiment, garlic is an important economic crop in China (Qi *et al.*, 2022). Mechanized sowing of garlic can reduce labor intensity, improve production efficiency, reduce planting costs and increase income. Domestic and foreign scholars have carried out extensive research on mechanized sowing of garlic (Benjaphragairat, 2010; Li *et al.*, 2017; Nare *et al.*, 2014; Guo *et al.*, 2021; Hou *et al.*, 2021; Li *et al.*, 2020). The posture of garlic in planting abroad is mainly lying flat, and the requirement for garlic posture is low (Bakhtiari and Loghavi *et al.*, 2009; Cui *et al.*, 2018; Zhang *et al.*, 2021; Im *et al.*, 2023; Song *et al.*, 2024), while upward orientation of garlic bulbs when planting has the advantages of high yield, good quality and high consistency of seedling emergence (Jin *et al.*, 2008). Domestic garlic planting is mainly based on upward posture of garlic bulbs. The special requirements of garlic planting posture increase the difficulty of garlic planting and limit the progress of garlic planting mechanization. Therefore, it is of great significance for the development of garlic industry to design a seed posture adjustment device to realize the posture adjustment of seeds when planting.

Some scholars have carried out research work on mechanical

garlic bud posture adjustment and designed a mechanical mechanism to complete the garlic bud posture adjustment by using the physical and mechanical characteristics such as the center of gravity of the garlic seeds. Cui *et al.* (2022) designed an arc duck-billed garlic seed planter and carried out research on the working links of the planter such as single seed picking, bud direction control, and vertical planting, so as to better realize the adjustment of bud posture. Hou *et al.* (2018) designed a double duckbill garlic planter and adjusted the garlic bud posture by the upper and lower duckbill. Geng *et al.* (2018) designed a three-layer conical hopper, which used a three-layer hopper to make garlic seeds fall step by step to turn the bud posture. Xie *et al.* (2015) designed a sowing device based on the shape characteristics of garlic seeds, so that the seeds could meet the requirements of verticality after being buried. The adjustment of garlic seed posture by utilizing the physical and mechanical properties of the garlic seeds has a relatively good adjustment effect on garlic seeds with distinct features, but the adjustment effect on hybrid garlic seeds is not ideal (Geng *et al.*, 2020; Cheng *et al.*, 2023).

Some scholars have adopted automatic control technology to adjust the posture of garlic seeds and achieved certain results. Li *et al.* (2008), Zhao and Ma (2013), Yang (2010), Liu *et al.* (2022) and

Wu *et al.* (2023) collected images of garlic seeds, respectively and identified bud tip or root of garlic seeds by image recognition. Based on capacitance detection technology, bilateral image recognition, deep learning and other technologies, Hou *et al.* (2020) realized garlic bud recognition and designed a garlic bud orientation adjustment device. The identification of bud orientation through image acquisition provides a new method for realizing the posture adjustment of garlic buds (Hou *et al.*, 2020; Li *et al.*, 2021; Hou *et al.*, 2023).

In this paper, the garlic bud posture adjustment was taken as the goal, and the garlic bud posture detection and adjustment device were designed. The research was conducted on image acquisition, bud recognition, bud posture adjustment to realize the accurate adjustment of garlic bud and provided reference for garlic mechanical planting.

Materials and Methods

Overall structure and working principle

The seed posture detection and adjustment device for garlic was mainly composed of a posture adjustment system and an automatic control system, as shown in Figure 1. The posture adjustment system consisted of a conveyor pipe, a seed tube, a garlic funnel, a fixed plate, a rotating plate and a shell. The rotating plate was driven by a stepper motor. The automatic control system consisted of CM35D-40 controller, industrial camera, power supply, stepper motor, TB6600 motor driver.

When the garlic seeds entered the conveyor pipe by the garlic funnel, the industrial camera detected the garlic seed posture (with the bud up or down) in real-time and made a judgment. When the garlic seeds entered the turning device through the transparent conveyor pipe, the buds facing up went directly down into the seed tube through the rotating plate inside the device, while the buds facing down enter the rotating plate and rotate 180° to adjust to the state of buds facing up before entering the seed tube, completing the orientation of garlic seeds. The device could identify three rows at the same time by one camera.

Design of the seed posture adjustment device

Design of conveyor pipe

When the garlic seeds entered the conveyor pipe, video acquisition and posture detection were carried out. The diameter of the pipe determined whether the garlic seeds could be transported normally, and the length and inclination of the conveyor pipe determined the conveying speed and time. Therefore, it was important to design the diameter, length and inclination of the conveyor pipe.

Determination of the conveyor diameter

The garlic seed was conveyed to the turning device through the transparent conveyor pipe, and the garlic seed in the conveyor pipe could only be in the state of bud facing up or bud facing down. Six typical garlic species, such as Jinxiang garlic, Lanling garlic and Yunnan garlic, were measured. The length of garlic seeds ranged from 28 mm to 40 mm, the width of garlic seeds ranged from 17 mm to 25 mm, and the thickness of garlic seeds ranged from 18mm to 25 mm. Therefore, the diameter of transparent conveyor pipe was determined to be 26 mm. In order to facilitate video capture, the conveyor pipe was made of transparent resin material.

Design of length and inclination angle of conveyor pipe

The length and inclination angle of the conveyor pipe have an important influence on the falling time of garlic seeds, and the working efficiency is improved as much as possible on the premise of ensuring clear image acquisition.

The forces acting on the garlic seed in the transparent conveyor pipe are shown in Figure 2.

The resultant force of garlic seed in the transparent conveyor pipe is:

$$\sum F = G_1 - f = mg\sin\theta - \mu mg\cos\theta \quad (\text{Eq. 1})$$

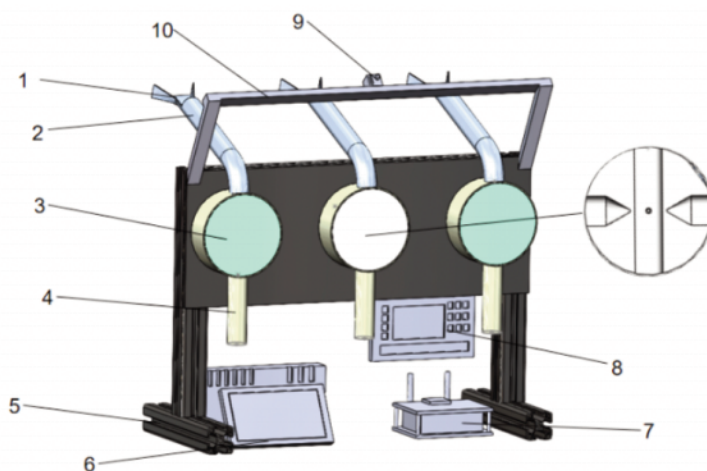


Figure 1. Structure diagram of seed posture detection and adjustment device for garlic. 1, Garlic funnel; 2, transparent conveyor pipe; 3, turning device; 4, seed tube; 5, frame; 6, electronic screen; 7, Jetson Nano; 8, CM-35D controller; 9, industrial camera; 10, camera mount.

At this time, the acceleration of garlic down along the inclined pipe is:

$$a = \frac{\sum F}{m} = g (\sin\theta - \mu\cos\theta) \quad (\text{Eq.2})$$

From $s = \frac{1}{2}at^2$, it can be obtained:

$$\begin{aligned} t &= \sqrt{\frac{2s}{a}} = \sqrt{\frac{2 \times \frac{L}{\cos\theta}}{g(\sin\theta - \mu\cos\theta)}} = \sqrt{\frac{2L}{g\cos\theta (\sin\theta - \tan\phi\cos\theta)}} \\ &= \sqrt{\frac{2L}{g\cos\theta \frac{(\sin\theta\cos\phi - \sin\phi\cos\theta)}{\cos\phi}}} \\ &= \sqrt{\frac{2L\cos\phi}{g\cos\theta\sin(\theta-\phi)}} = \sqrt{\frac{2L\cos\phi}{g\cos\theta \frac{1}{2}[\sin(2\theta-\phi) - \sin\phi]}} \\ &= \sqrt{\frac{4L\cos\phi}{g[\sin(2\theta-\phi) - \sin\phi]}} \quad (\text{Eq.3}) \end{aligned}$$

where $\phi = \arctan(\mu)$; t , sliding time of garlic (s); θ , slope angle of inclined pipe ($^\circ$); a , the sliding acceleration of garlic seeds (m/s^2); g , gravitational acceleration (9.80 m/s^2); L , horizontal projection length of the pipeline (m); μ , friction coefficient of garlic seeds.

Determination of conveyor pipe color

In order to facilitate the image acquisition of garlic seeds, transparent resin material was used for conveyor pipe. In the experiment, it was found that the mechanism under the transparent inclined conveyor pipe was also collected into the image when the image was collected, which not only affected the recognition efficiency, but also affected the detection accuracy. In this study, different colors would be applied to the back of the conveyor pipe without affecting the camera's collection of garlic photos. Whether the different colors on the back of the conveyor pipe would affect the target detection efficiency and accuracy would be compared through experiments.

In this experiment, seven treatments of colorless, white, blue, black, green, yellow and red were selected, as shown in Figure 3. Lanling garlic was used for garlic seeds, and 10 experiments were carried out for each color. The test results were shown in Table 1.

As shown in Table 1, when the back color of the conveyor pipe was blue, the shortest time for target detection was 0.481s, and the recognition accuracy reached 100%. Therefore, the conveyor pipe with a blue back was adopted.

Design of turning device

The turning device was composed of a shell, a garlic bud rotating plate and a seed tube. The garlic bud rotating plate was the core mechanism to complete the orientation of garlic seeds, and the garlic bud rotating plate was driven by a motor. The working principle of the garlic bud rotating plate was shown in Figure 4.

When the garlic seeds entered the garlic bud rotating plate through the conveyor pipe, the garlic seeds with the bud facing up

Table 1. Different color identification test and test results.

Color	Recognition accuracy rate/%	Average identification time/s
Colorless	98.6	0.512
White	100	0.502
Blue	100	0.481
Black	100	0.496
Green	100	0.493
Yellow	100	0.507
Red	100	0.493

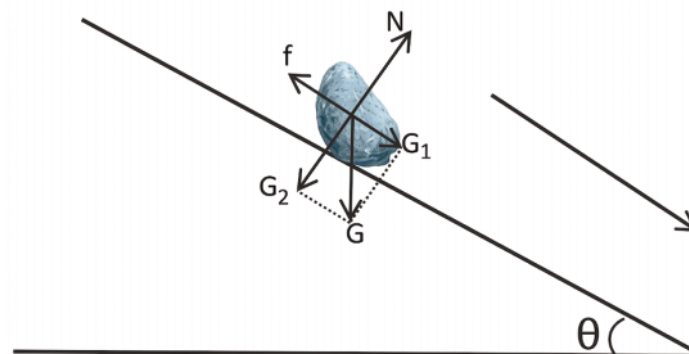


Figure 2. Force analysis of garlic seed in conveyor pipe. N , support force exerted on the garlic seed; G , gravity acting on the garlic seed; G_1 , component force of gravity acting on the garlic seed along the direction of the inclined surface; G_2 , gravity acting on the garlic seed perpendicular to the inclined plane; f , friction of the garlic seed.

entered the hole and fell directly into the seed tube. When the garlic seeds with the bud facing down entered the blind hole of the garlic bud rotating plate, the control system controlled the rotating plate to rotate 180°, and garlic seeds were adjusted to the state of bud facing up and fell into the seed tube.

Design of automatic control system

The automatic control system included video acquisition module, target detection module and garlic-oriented action control module. The hardware composition was shown in Figure 5.

The main function of the system was to execute and control camera shooting, image processing and target detection, input action signal to the controller and receive feedback of action signal. The control core of the system was Jetson Nano (NVIDIA, Santa Clara, CA, USA) an edge computing processor with high performance. The controller received the signal conveyed by the Jetson Nano processor, converted the signal, and then transmitted it to the driver controlling the rotation axis of each stepper motor, and recorded the rotation angle and rotation time, then fed it back to the Jetson Nano processor. The system used CM35D-40 four-axis controller. The camera selected SONY (Tokyo, Japan) IMX179 industrial camera with high resolution to comprehensively cover the multi-row garlic seed channel to capture garlic seed

video. The industrial camera was controlled by Jetson Nano to capture the video of garlic in the transparent conveyor tube, and continuously provided the source video for target detection. The object detection module detected the captured video through the object detection algorithm, and the folder where the image was located after detection provided instructions for controlling the garlic seed bud orientation adjustment device. The garlic-oriented action control module was used by the Jetson Nano processor to identify the image folder after detection, and provide action instructions to the PCA9685 chip and the CM-35D four-axis controller, which then controlled the rotation of the rotary drive motor to complete the garlic seed orientation. The workflow was shown in Figure 6.

Garlic seed posture recognition algorithm based on target detection technology

This system adopted SSD algorithm (Qin *et al.*, 2022; Su, 2022), took VGG16 as the basic model, and drew on DeepLab-LargeFOV to transform the fully connected layers fc6 and fc7 of VGG16 into convolution layers conv6 and conv7. At the same time, the pool layer pool5 was changed from the original stride=2 to stride=1 3*3. Correspondingly, an Atrous Algorithm was adopted, that was, conv6 used extended convolution or perforated convolution. Without increasing the complexity of the parameters and

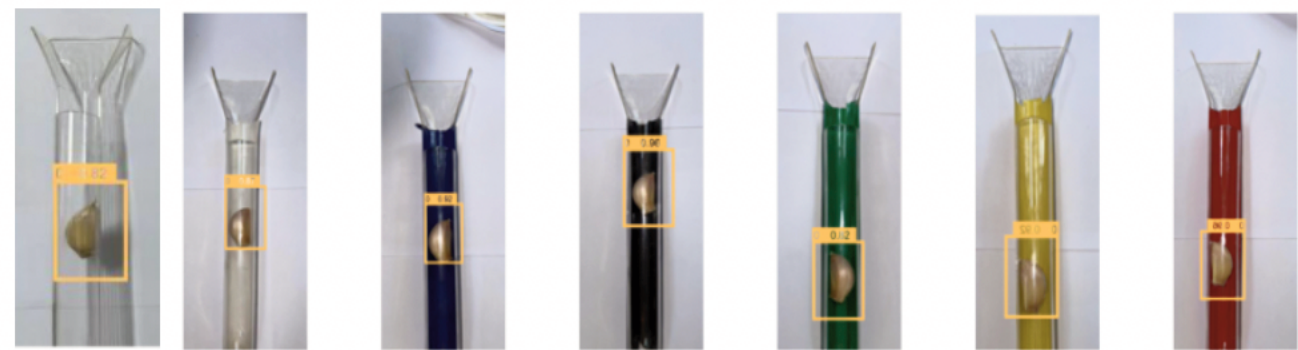


Figure 3. Differential contrast of the recognition boxes under different colors.

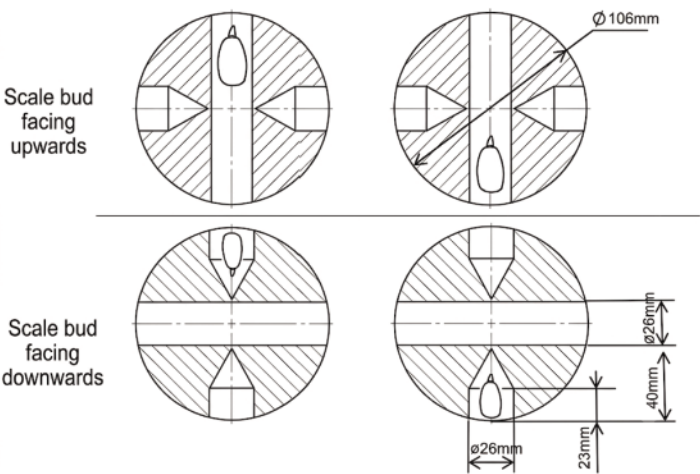


Figure 4. Working principle of garlic bud rotating plate.

the model, the convolution field of view was expanded exponentially, and the expansion rate (dilation rate) parameter was used to represent the expansion size (Figure 7): i) was an ordinary 3*3 convolution, the field of view was 3*3; ii) was the expansion rate of 2, the field of view became 7*7; iii) represented when the expansion rate was four, the field of view was expanded to 15*15, but the characteristics of the field of view were more sparse (Yao, 2022). Conv6 used an extended convolution of 3*3 size, but dilation rate=6.

After determining the training samples, the loss function needed to be determined, which was defined as the weighted sum of localization loss (loc) and confidence loss (conf):

$$L(x, c, l, g) = \frac{1}{N} (L_{conf}(x, c) + \alpha L_{loc}(x, l, g)) \quad (\text{Eq.4})$$

where: N is the number of positive samples of the prior box. Here, $x_{p\ ij} \in \{1, 0\}$ was an indicator parameter, when $x_{p\ ij}=1$, the i th prior box matched the j th garlic seed, and the garlic seed category was p ; c was the predictive value of category confidence; l was the position prediction value of the corresponding bounding box of the prior box, and g was the position parameter of the garlic seed. For position errors, Smooth $_{L1}$ loss was used, defined as follows:

$$L_{loc}(x, l, g) = \sum_{i \in \text{Pos}} \sum_{m \in \{cx, cy, w, h\}} x_{ij}^k \text{smooth}_{L1}(l_t^m - \hat{g}_j^m) \quad (\text{Eq.5})$$

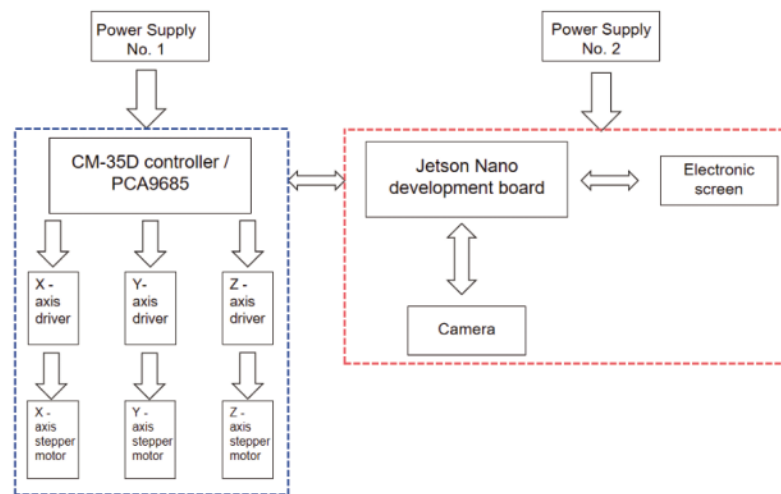


Figure 5. Structure diagram of hardware system.

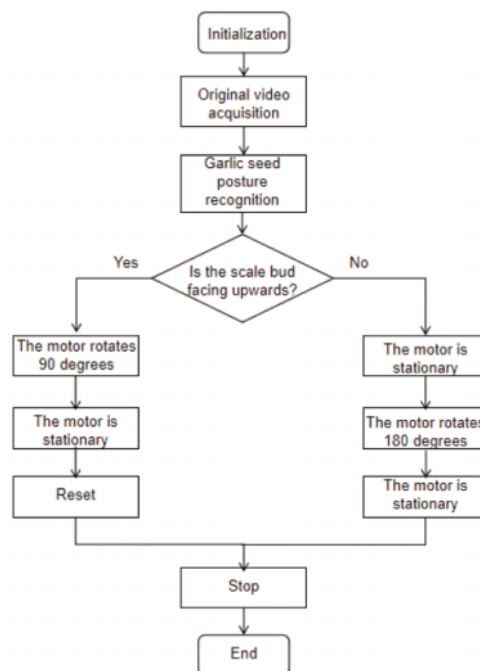


Figure 6. System control flow chart.

$$\begin{aligned} \hat{g}_j^{cx} &= (g_j^{cx} - d_i^{cx}) / d_i^w & \hat{g}_j^{cy} &= (g_j^{cy} - d_i^{cy}) / d_i^h & \hat{g}_j^w &= \log \left(\frac{g_j^w}{d_i^w} \right) & \hat{g}_j^h &= \log \left(\frac{g_j^h}{d_i^h} \right) \\ \text{smooth}_{L_1}(x) &= \begin{cases} 0.5x^2 & \text{if } |x| < 1 \\ |x| - 0.5 & \text{otherwise} \end{cases} \end{aligned} \quad (\text{Eq.6})$$

Because of the existence of $x_{p\ ij}$, the position error was calculated only for positive samples. The g of garlic seed was encoded to obtain $\hat{g}$. If `variance_encoded_in_target=True` was set, variance should be added to the encoding:

$$\hat{g}_j^{cx} = (g_j^{cx} - d_i^{cx}) / d_i^w / \text{variance}[0] \quad (\text{Eq.7})$$

$$\hat{g}_j^{cy} = (g_j^{cy} - d_i^{cy}) / d_i^h / \text{variance}[1] \quad (\text{Eq.8})$$

$$\hat{g}_j^w = \log (g_j^w / d_i^w) / \text{variance}[2] \quad (\text{Eq.9})$$

$$\hat{g}_j^h = \log (g_j^h / d_i^h) / \text{variance}[3] \quad (\text{Eq.10})$$

The weight coefficient α was set to 1 by cross validation.
Eqs. 4 through 10 are derived from the Chinese Software Developer Network (https://blog.csdn.net/qq_41368247/article/details/88027340).

Control design of CM-35D four-axis controller

The controller needs to connect three motor drives. The stepper motor has two rotation instructions A and B. The A instruction performs the action when the garlic bud is upward, and the B instruction performs the action when the garlic bud is downward. In order to ensure that three rows of garlic seeds are transported to the next seed tube at the same time, the system control instructions are shown in Table 2.

It can be seen from Table 2 that the time length of the garlic seed control turnaround and reset is 0.5 s.

Determination of other parameters

In order to improve the detection efficiency, the garlic seed posture detection experiment was carried out. The results showed that when the installation distance between the camera and the transparent conveyor pipe was 15cm, the back color of the conveyor pipe was blue, equipped with a light shield and illuminated by LED lights, and the camera resolution was 1600*1200, the recognition of garlic seed posture was the best. The garlic posture recognition time was 0.31 s.

The inclination angle of the transparent conveyor pipe has an important influence on the conveying efficiency and video clarity. Considering comprehensively, the inclination angle θ of the transparent conveying pipe was 35°.

By substituting $t=0.31$ and $\theta=35^\circ$ into formula (3), $L=17.90$ cm was obtained, that was, the length of transparent conveyor pipe was 17.90 cm+4 cm (garlic seed length), that was 21.9 cm.

The aforementioned design is intended to achieve automated control of garlic clove orientation during sowing, ensuring that the scaly bud faces upward.

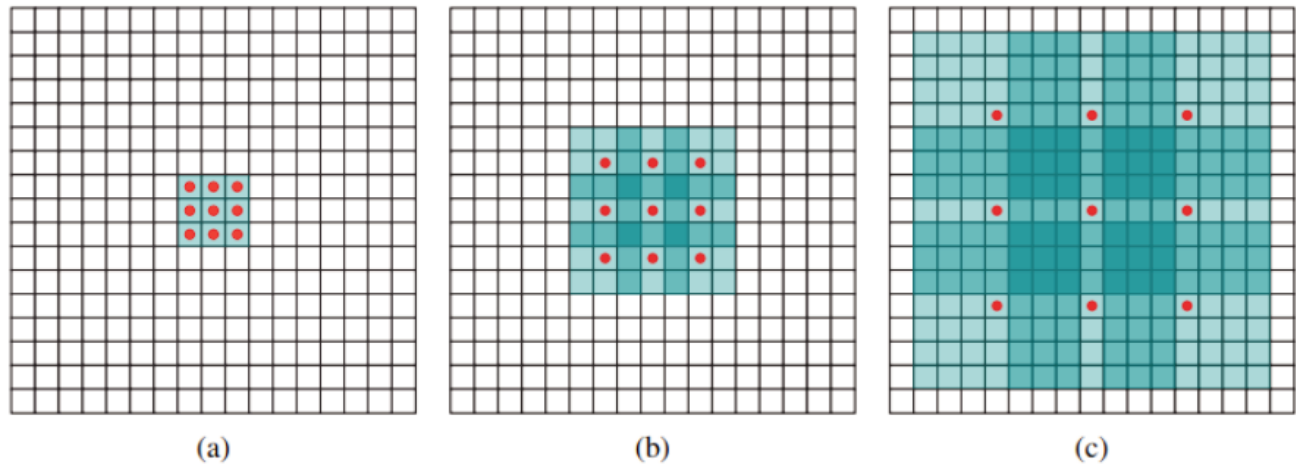


Figure 7. Extended convolution.

Table 2. System control instruction flow sheet.

Instruction A		Instruction B	
Action 1	Clockwise rotation 90° (0.1 s)	Static 0.2 s	
Action 2	Static 0.3 s		Clockwise rotation 180° (0.1 s)
Action 3	Clockwise rotation 90° (0.1 s) (Reset)		Static 0.2 s
Action 4	Finish		Finish

Results and Discussion

Six species of garlic seeds with large scale planting in China were selected as samples: Lanling garlic seeds, Jinxiang garlic seeds, Kaiyuan garlic seeds, Baodi garlic seeds, Sheyang garlic seeds and Yunnan purple garlic seeds; 50 garlic seeds were randomly selected for bud orientation adjusting test.

After designing the size and structure of the key components of the test bench, a high-precision and high-quality 3D printer (printing material was transparent resin and imported 5400 material) was selected to print the key components. When the printing was completed, it was assembled with the aluminum alloy frame,

and tested on the self-built multi-rows garlic bud adjustment device test bench that relied on target detection. The garlic seed posture detection and adjustment device test bench were shown in Figure 8. The test results were shown in Table 3.

In this system, garlic posture recognition and garlic bud orientation adjustment could be carried out simultaneously, and the operation of the system was shown in Figure 9. The yellow rectangle represented the garlic seed transportation time, and the blue rectangle represented the garlic seed posture mechanical adjustment and system reset time. The total time of the first operation of the device was 0.81 s, and each subsequent operation was 0.5 s.

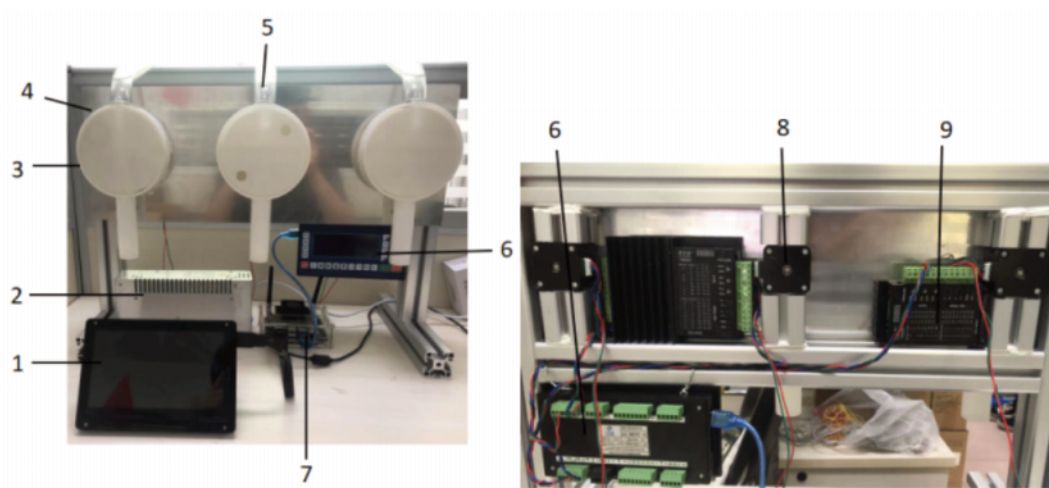


Figure 8. Experiment table of seed posture detection and adjustment device for garlic. 1, Display screen; 2, power supply; 3, turning device; 4, shell; 5, transparent conveyor pipe; 6, CM35D-40 controller; 7, Jetson Nano; 8, 42 stepper motor; 9, stepper motor controller.

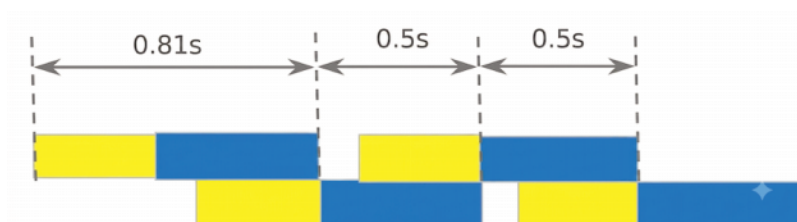


Figure 9. Time of garlic seed orientation.

Table 3. Test results.

Garlic seed posture	Parameter	Value
Bud upward	Recognition success rate	100%
	Orientation success rate	100%
	Recognition time	0.29 s
	Conveying time	0.31 s
	Mechanical adjustment time	0.4 s
	Reset time	0.1 s
Bud downward	Recognition success rate	98.6%
	Orientation success rate	98.6%
	Recognition time	0.31 s
	Conveying time	0.31 s
	Mechanical adjustment time	0.5 s
	Reset time	0 s

Conclusions

A new type of multi-row seed posture detection and adjustment device for garlic was designed. There were only two postures of garlic seeds in the whole device, which was upward or downward. By cooperating with the intelligent control system of the device, garlic seeds could be adjusted to upward. A camera could identify three rows at the same time, which met the requirements of bud upward planting of garlic seeds.

The target detection module of this system was completed with the help of SSD algorithm, and the process was optimized on this basis. In the experiment, the database of garlic seeds pictures was expanded to make this algorithm meet the requirements of this design.

The garlic seed posture detection and adjustment device test bench were built, and the performance test of the whole system was carried out. The results showed that after adjustment the upward rate of garlic buds was $\geq 98.6\%$, and the orientation time of garlic buds adjustment was 0.5 s. The upward rate of garlic buds and orientation adjustment efficiency were significant.

References

- Bakhtiari MR, Loghavi M, 2009. Development and evaluation of an innovative garlic clove precision planter. *J Agric Sci Technol* 11:125-136.
- Benjaphragairat J, Ito N, Sakurai H, 2010. Study of the mechanics of a 5 HP power tiller attached to a 10-Row garlic planter. *AMA Agric Mech Asia Afr Lat Am* 41:40-44.
- Cheng Z, Song J, Xu H, Zhang M, 2023. [Overview of intelligent orientation technology of garlic seed based on machine vision].[Article in Chinese with English abstract]. *J Intell Agric Mech* 4:63-70.
- Cui R, Huang JB, Zhang ZH, 2018. [Research status of garlic mechanized sowing technology].[Article in Chinese with English abstract]. *Agric Equip Vehicle Eng* 56:54-56.
- Cui R, Wang X, Xin J, Sun L, Wu C, 2022. [Design and test of arc duck-billed garlic seed planter].[Article in Chinese with English abstract]. *Nongye Jixie Xuebao/Trans Chin Soc Agric Mach* 53:120-130.
- Geng A, Li X, Hou J, Zhang Z, 2018. [Design and experiment of automatic directing garlic planter].[Article in Chinese with English abstract]. *T CSAE* 34:17-25.
- Geng A, Li X, Hou JL, Zhang J, Zhang Z, Chong J, 2020. Design and experiment of automatic garlic seed directing device. *Int J Agric Biol Eng* 13:85-93.
- Guo H, Cao Y, Song W, Zhang J, Wang C, Wang C, et al. 2021. Design and simulation of a garlic seed metering mechanism. *Agriculture* 11:1239.
- Hou J, Huang S, Niu Z, Wu Y, Li T, 2018. [Mechanism analysis and test of adjusting garlies upwards using two duckbill devices].[Article in Chinese with English abstract]. *Nongye Jixie Xuebao/Trans Chin Soc Agric Mach* 49:87-96.
- Hou J, Tian L, Li T, Niu Z, Li Y, 2020. [Design and experiment of test bench for garlic bulbil adjustment and seeding based on bilateral image identification].[Article in Chinese with English abstract]. *T CSAE* 36:50-58.
- Hou J, Liu Q, Li TH, 2021. [Design and experiment of the garlic seed metering device with double seed-filling chambers].[Article in Chinese with English abstract]. *T CSAE* 37:21-32.
- Hou J, Fang L, Li Y, Wu Y, Zhou K, 2023. Design and test of garlic clove orientation device based on capacitive detection technology. *Nongye Jixie Xuebao/Trans Chin Soc Agric Mach* 54:63-72.
- Im D, Lee HS, Kim JH, Moon DJ, Moon TI, Yu SH, Park YJ, 2023. Bucket size optimization for metering device in garlic planter using discrete element method. *Agriculture* 13:1199.
- Jin C, Yuan W, Wu C, Zhang M, 2008. [Experimental study on effects of the bulbil direction on garlic growth].[Article in Chinese with English abstract]. *T CSAE* 24:155-158.
- Li H, Deng S, Xu J, Li N, 2008. [Research of garlic graphics recognition algorithm].[Article in Chinese with English abstract]. *Comput Knowl Technol* 20:328-330.
- Li X, Geng AJ, Hou J, Zhang K, Zhang L, 2017. [Design and experiment of full-automatic lifting and releasing device of garlic seed box].[Article in Chinese with English abstract]. *T CSAE* 33:32-37.
- Li T, Huang S, Niu Z, 2020. [Optimization and experiment of planting perpendicularity of planetary wheel garlic planter].[Article in Chinese with English abstract]. *T CSAE* 36:37-45.
- Li Y, Liu Q, Li T, Wu Y, Niu Z, Hou J, 2021. Design and experiments of garlic bulbil orientation adjustment device using Jetson Nano processor.[Article in Chinese with English abstract]. *T CSAE* 37:35-42.
- Liu J, Yuan J, Cui H, Liu Y, Liu X, 2022. Contour resampling-based garlic clove bud orientation recognition for high-speed precision seeding. *Agriculture* 12:1334.
- Nare B, Shrivastava AK, Naik PK, Prakash A, 2014. Design, development and evaluation of self propelled garlic (*allium sativum* L.) clove planter. *AMA Agric Mech Asia Afr Lat Am* 45:74-79.
- Qi C, Zhou J, Fu JP, 2022. [Identification and evaluation of garlic germplasm resources and screening of excellent germplasm].[Article in Chinese with English abstract]. *China Vegetables* 6:25-32.
- Qin D, Lin Y, Liang X, 2022. [Improved SSD algorithm based on feature fusion and attention mechanism].[Article in Chinese with English abstract]. *J Lanzhou Inst Technol* 29:72-77.
- Song J, Zhang Y, Wang Z, Li K, Cui Z, Fang F, Yang Q, 2024. [Design and experiment of asymmetrical planting implement for garlic upright planter].[Article in Chinese with English abstract]. *Nongye Jixie Xuebao/Trans Chin Soc Agric Mach* 52:75-85.
- Su K, 2022. Research on UAV target detection based on improved SSD. Hebei University of Science and Technology.
- Wu X, Hu W, 2016. [Research on garlic clove orientation recognition based on observation window].[Article in Chinese with English abstract]. *Meas Control Technol* 35:35-39.
- Xie X, Zhang Y, Liu Z, Cheng Y, 2015. [Design of planting mechanism for garlic planter].[Article in Chinese with English abstract]. *T CSAE* 31:34-39.
- Yang QM, 2010. Design of the sorting mechanism of garlic planter based on image processing. Nanjing Agricultural University.
- Yao J, 2022. Research on the robustness of deep convolutional neural networks for computer vision tasks. Beijing Jiaotong University.
- Zhang C, Wu X, Xie D, 2021. [Design and experiment of electro-hydraulic mixed garlic planter]. *Nongye Jixie Xuebao/Trans Chin Soc Agric Mach* 52:166-174.
- Zhao L, Ma Z, 2013. [The study of garlic machine installation system of the directional recognition algorithm].[Article in Chinese with English abstract]. *J Agric Mech Res* 35:163-166.

Received: 10 March 2026; Accepted: 17 April 2026.

Contributions: all the authors made a substantive intellectual contribution, read and approved the final version of the manuscript and agreed to be accountable for all aspects of the work.

Conflict of interest: the authors declare no competing interests, and all authors confirm accuracy.

Availability of data and materials: all data generated or analyzed during this study are included in this published article.

Publisher's note: all claims expressed in this article are solely those of the authors and do not necessarily represent those of their affiliated organizations, or those of the publisher, the editors and the reviewers. Any product that may be evaluated in this article or claim that may be made by its manufacturer is not guaranteed or endorsed by the publisher.

This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License (CC BY-NC 4.0).